8032747

PERMISSIBLE VARIATION ON COMMON FRACTION DIMENSIONS TO MACHINED SURFACES TO BE ± .010 UNLESS OTHERWISE SPECIFIED.

BREAK ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.

COUNTERSINK ALL TAPPED HOLES 118° X ONE THR'D DEEP

STANDARD PART

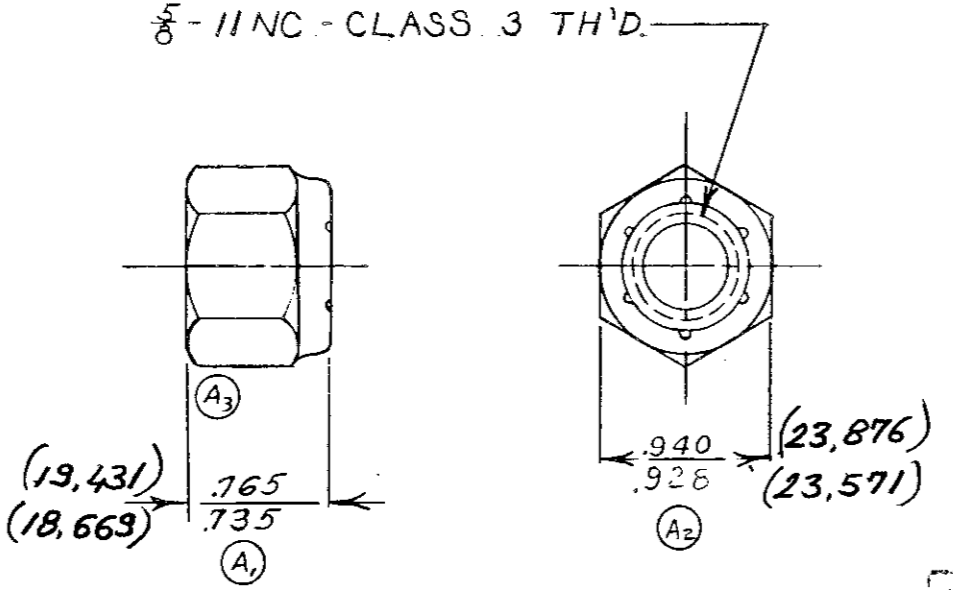

1708 28

ENGINEERING APPROVAL
OF SUPPLY REQUIRED

R. F. C. NO.	REV. LET.	REVISION	DATE	BY	CK.	APV'D.
—	A_3	30° DIM. REM.				
—	A_1	WAS .859±.015 A_2 WAS 1.067 1.043				
Q-1257	A	MAT. WAS STL FIBRE INSERT	3-16-54	EVANS		
		FIRST USED ON				

NO. REQ'D PER ASSEMBLY

MATERIAL: STL: NON-METALLIC INSERT
PLAIN FINISH

DR. D. Swan	6-29-48
CK.	7-23-48
CH. CK.	7-29-48
CH. DR.	7-30-48
ENGR. Stock	8-13-48

NAME OF PART | PART NO. | IT NO.

ELECTRO-MOTIVE DIVISION
GENERAL MOTORS CORPORATION
LA GRANGE, ILLINOIS, U.S.A.

NUT - 5/8 - 11 SLFLKG

DATE OF PRINT [redacted]

PART NO. 8032747

EMD 403A-2 1000 3-48

GLENNON & KERR, CHICAGO