



B	탄성률	> 40	2	4
		> 30	2	3
		> 10	1	1.5
		< 3	0.5	1
	강도	> 3150	-	7
		> 1600	4	5
		> 800	3	4
		> 400	2	3
		> 200	1.5	2
		> 100	1	1.5
A	중량률	A B C		
	CASITANE	(±)		
	> 29H	8	14	24
	> 15H	7	12	21
	> 2H	6	10	18
	> 1H	5	8	14
	> 4H	4	6	11
	> 2H	3	4	8
	> 1H	2	3	6
	> 315	1	2	4
A	융점	A B C		
	MELTING	(±)		
	> 15H	-	6.0	8.0
	> 15H	-	3.0	5.0
	> 15H	-	2.0	6.0
	> 9H	-	3.0	7.0
	> 4H	0.2	2.0	4.0
	> 2H	0.5	1.2	3.0
	> 315	0.3	0.8	2.0
	> 315	0.2	0.5	1.2
A	기계적 특성	A B C		
	TENSILE	(±)		
	> 120	0.1	0.3	0.8
	> 30	0.1	0.2	0.5
	> 3-6	0.05	0.1	0.2
	충격	A B C		
	충격	(±)		
	충격	A B C		
	충격	(±)		
	충격	A B C		

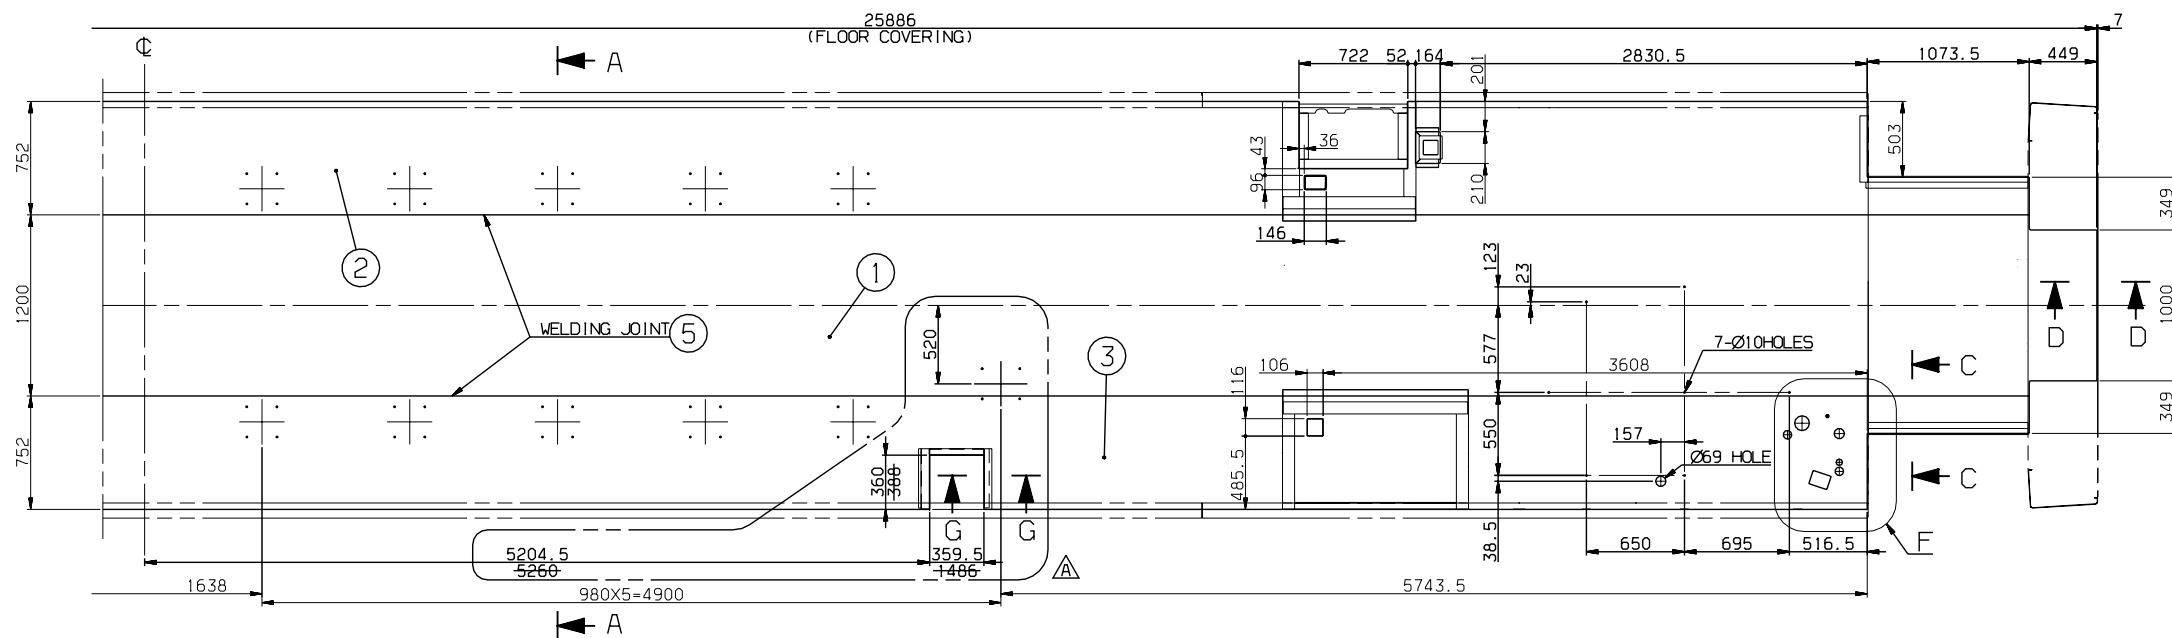

품명 NO.	부분 PART NO.	品 DESCRIPTION	재질 MATERIAL	수량 Q'TY	종류 V.T	비고 REMARKS
순인 APP	JeongYul Lee 2014. 07.23	지상 MAT'L ASSY	명 FLOOR,COVERING FITTING, TITLE M CAR (1/2)			
강도 CHK	KeongBong Park 2014. 07.23	총량 G.W				
설계 DGN	JinWoo Jeong 2014. 07.23	원 MC MD CT SCALE 1/25	도면 DRG. NO RFP31002EJO	MS		Ver. 00 Rev. -A RSD1402
제도 DRG	HeeSook Jeong 2014. 07.23	B B B SIZE A1	매수 SHEET 1 of 2			RFP-
			HYUNDAI Ro'tem 현대로템주식회사			본-PRJT 질리번호