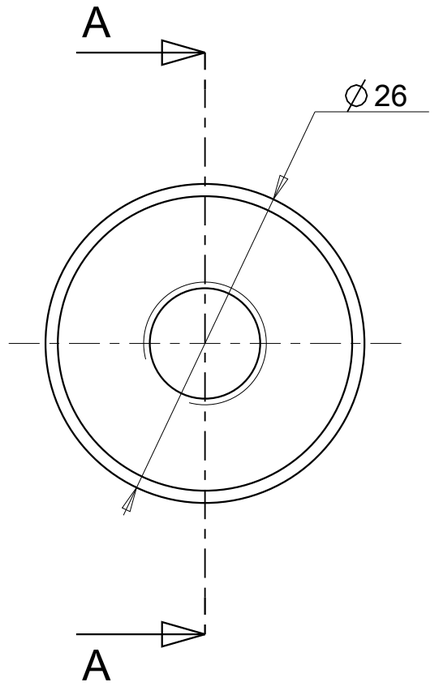

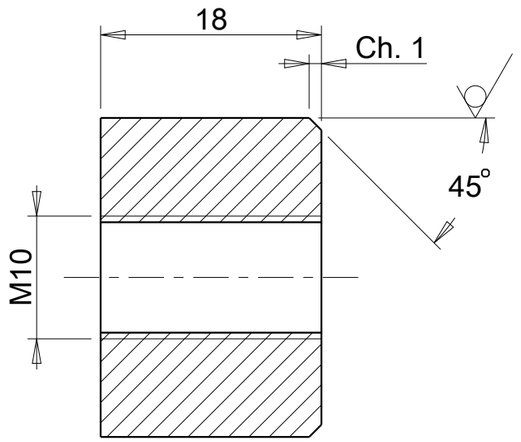

SECTION A-A

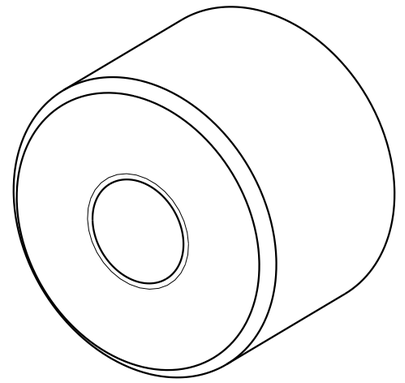

TS 12708 Steel Casting			
	<1000	6,0	0,8
	<630	4,0	0,7
	<400	3,0	0,6
	<250	3,0	0,4
	100	2,0	0,3
	40	1,5	0,2
	L mm	Raw	Form
	Nom. Size	Class	

ISO 2768 General Tolerance			
	<4000	2,0	0,4
	<2000	1,2	0,4
	<1000	0,8	0,3
	<400	0,5	0,3
	30-120	0,3	0,2
	2-30	0,2	0,1
	L mm	m ±	K ±
	Nom. Size	Class	

ISO 13920 Welded Construction			
	>20000	9,0	8,0
	<20000	8,0	7,0
	<16000	7,0	6,0
	<12000	6,0	5,0
	<8000	5,0	4,0
	<4000	4,0	3,0
	<2000	3,0	2,0
	<1000	2,0	1,5
	<400	1,0	1,0
	30-120	1,0	0,5
	2-30	1,0	0,5
	L mm	A ±	E ±
	Nom. Size	Class	

Ra 12.5

( )

Machined from stocking round bar according to EN 10277
Diameter = 26 mm

Technical Specifications	-				
Technical Document	-				
Fixture/Mould Asset ID.	-				
Coating/Heat Tre./Roughness	-				
Paint/Color	-	Modf.No	Modification Description	Date	Sign

				X5CrNi1810 EN 10088-2		0.1
No	Parça Adý Designation Name of Item	Adet Qty.	Resim No / Norm Drawing No / Norm	Malzeme Material	Ölçü Dimension	Ağirlik Weight (Kg)
	ISO 1302 ISO 8015 EN 22553			General Tol.	ISO 2768 f ☐ m ☒ H ☐ K ☒	
	EN 15085-2 Certification Level CL1 ☐ CL2 ☐ CL3 ☐ CL4 ☐			Weld Prod.	ISO 13920 A ☒ B ☐ E ☒ F ☐	
				Cast Steel	ISO 12708 Lm2 ☐ Lr2 ☐ Sm2 ☐ Sr2 ☐	
	Approved P.FARINA			Scale	TÜVASAS	
	Checked M.BORLO			2:1	Turkish Wagon Industry	
	Prepared D.CARLINO					
TYP	Block				EM20.24.03.80030	
	Date:20/11/2018			Sheet:1/1	Size:A3	Rev:00

Reproduction, dissemination or use of this document or its all contents in any form without the prior written permission of TUVASAS, is prohibited. Offenders will be liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or ornamental design registration.