적 용 규 격
SPECIFICATION APPLIED

NOTES:
1. FOR INSTALLATION OF FRONT WINDOW GLASS, CLEAN THE BASE SURFACE ACCORDING TO THE PROCEDURE RECOMMANDED BY SILICON MANUFACTURER.
2. USE NO.12 NO.13 TO ADJUST THE GAP BETWEEN THE GLASS AND CAB MASK.
3. INSTALL NO.10 BEFORE SIDE DOOR INSTALLATION.

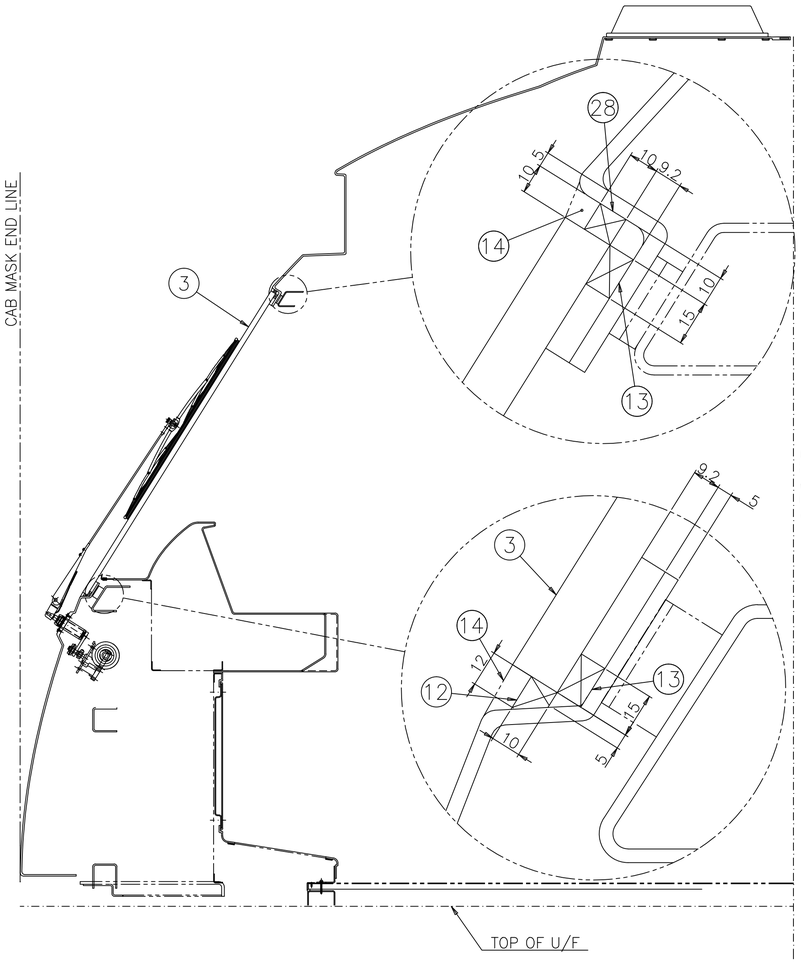

SECTION A-A

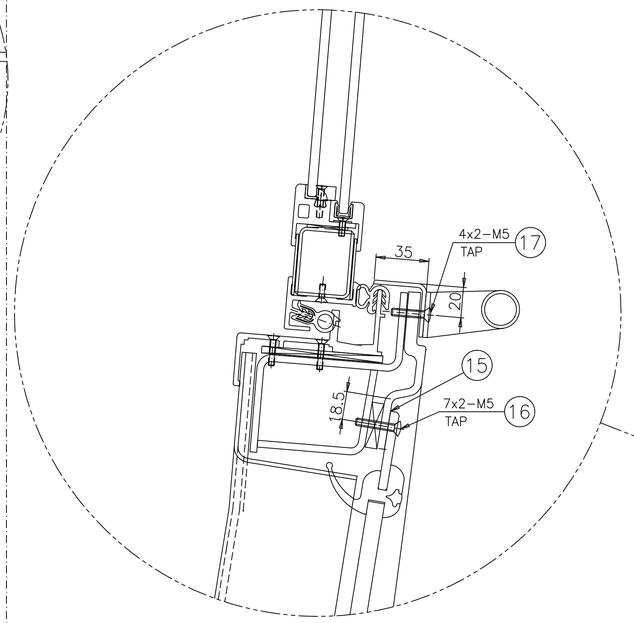

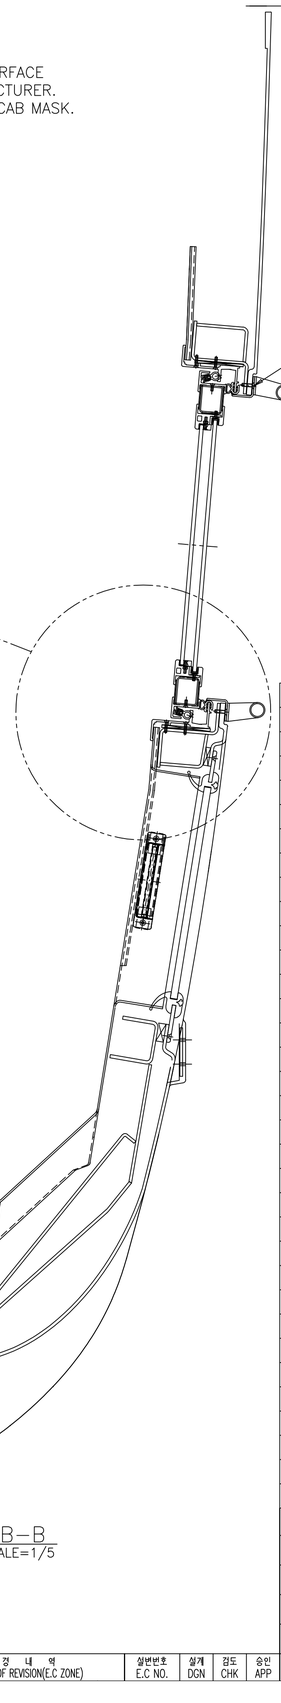

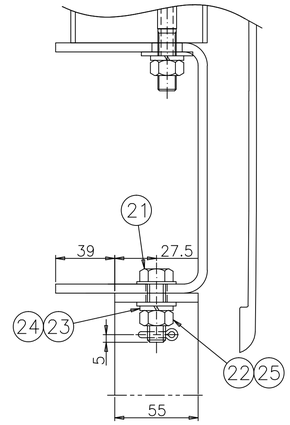

SECTION E-E
SCALE=1/2



SECTION B-B
SCALE=1/5

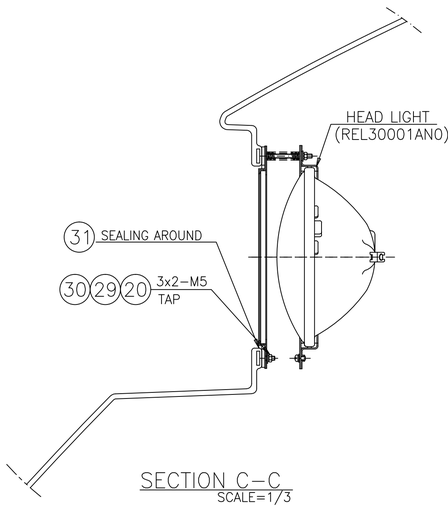

SECTION C-C
SCALE=1/3

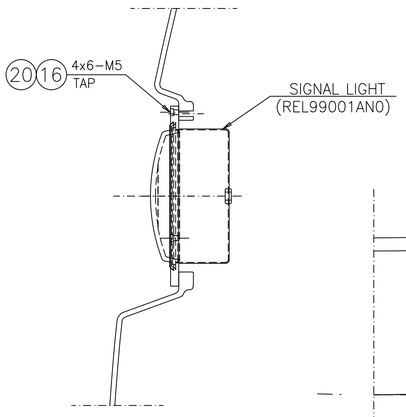

SECTION D-D
SCALE=1/3

34	REL32001AN0	TAIL LIGHT	ASSY	2		
33	REL99001AN0	SIGNAL LIHGT	ASSY	4		
32	REL30001AN0	HEAD LIGHT	ASSY	2		
31	RFC30001AN0-031	SEALANT	SILICON	300 CC		SIKAFLEX-221,GRAY,AR
30	RS60807-008S	WASHER PLAIN	SUS304	8		M5
29	RS60401-006S	NUT HEX.	SUS304	8		M5
28	RFC30001AN0-028	PACKING	EPDM	8		T10X10X30L
26	RFC30001AN0-026	ADHESIVE	ASSY	1200 CC		AR
25	RFC30001AN0-025	PIN SPLIT	ASSY	4		PI 4
24	RS60809-004S	WASHER PLAIN	SUS304	8		M12
23	RS60801-009S	WASHER SPRING	SUS304	4		M12
22	RS60401-010S	NUT HEX.	SUS304	4		M12
21	RS60114-123S	BOLT HEX.	SUS304	4		M12X35L
20	RS60801-005S	WASHER SPRING	SUS304	48		M5
18	RS60607-100S	F.H SCREW	SUS304	32		M4X20L
17	RS60609-119S	O.H SCREW	SUS304	16		M5X25L
16	RS60609-121S	O.H SCREW	SUS304	54		M5X35L
15	RFC30001AN0-015	SEALANT	ASSY	300 CC		SIKAFLEX-221,GRAY,AR
14	RFC30001AN0-014	SEALANT	ASSY	1200 CC		SIKAFLEX-265,BLACK,AR
13	RFC30001AN0-013	PACKING	EPDM	10		T9.2X15X30L
12	RFC30001AN0-012	PACKING	EPDM	6		30L
11	RFC30014AN0	HAND RAIL	ASSY	4		
10	RFC30013AN0	MOLDING ENTRANCE DOOR	ASSY	2		
9	RFC30012AN0	STEP FOOT	ASSY	2		
8	RFC30016AN0	MIRROR, SIDE	ASSY	1		
7	RFC30011AN0	MIRROR, SIDE	ASSY	1		
6	RFC30006AN0	INSTALLATION, WIPER	ASSY	1		
5	RFC37003AN0	WINDOW,CAB SIDE	ASSY	1		
4	RFC37002AN0	WINDOW,CAB SIDE	ASSY	1		
3	RFC37001AN0	WINDOW_GLASS, FRONT	ASSY	1		
2	RFC36001AN0	INSTALLATION,SKIRT FRONT	ASSY	1		
1	RFC35001AN0	INSTALLATION,CAB MASK	ASSY	1		

품번 NO.	부품 번호 PART NO.	품 명 DESCRIPTION	재 질 MATERIAL	수량 Q'TY	중량 W.T	비 고 REMARKS

승인 APP	H.G.RYU 2008.09.26	재질 MAT'L	ASSY
검도 CHK	H.S.KIM 2008.09.26	총중량 G.W	
설계 DGN	J.I.LEE 2008.09.26	일반공차 MC / WD / CT	
제도 DRG		SIZE A1	

명 칭 TITLE: INSTALLATION,CAB EXTERIOR (2/2)

도면 번호 DRG. NO: MS RFC30001AN0 Ver. 00 Rev. --

SCALE 1/10 매수 SHEET 2 of 2

참고번호 REF. NO. FCP03602

HYUNDAI Rotem / TÜVASAŞ DMU

08-305101 / FC-13 / 년-PRJT / 정리번호

기 호 MARK	일 자 DATE	변 경 내 역 DETAIL OF REVISION(E.C ZONE)	설변번호 E.C NO.	설계 DGN	검도 CHK	승인 APP

일반공차 GENERAL TOLERANCE			
주물 CASTING			
등급 GRADE	A	B	
~ 20M	8	14	24
~ 15M	7	12	21
~ 12M	6	10	18
~ 8M	5	8	14
~ 4M	4	6	11
~ 2M	3	4	8
~ 1M	2	3	6
~ 315	1	2	4
~ 120	1	2	3
~ 30	1	1	1
등급 GRADE	A	B	C
용접 구조물 WELDING			(±)
~ 20M	–	6.0	8.0
~ 15M	–	5.0	7.0
~ 12M	–	4.0	6.0
~ 8M	–	3.0	5.0
~ 4M	0.8	2.0	4.0
~ 2M	0.5	1.2	3.0
~ 1M	0.3	0.8	2.0
~ 315	0.2	0.5	1.2
~ 120	0.15	0.3	0.8
~ 30	0.1	0.2	0.5
3 ~ 6	0.05	0.1	0.2
등급 GRADE	A	B	C
기계 가공품 MACHINING			(±)
구멍지름은 실제크기로			